### (19) World Intellectual Property Organization

International Bureau





(43) International Publication Date 2 September 2004 (02.09.2004)

**PCT** 

### (10) International Publication Number WO 2004/075183 A1

(51) International Patent Classification7:

G11B 19/02

(21) International Application Number:

PCT/KR2004/000368

- (22) International Filing Date: 24 February 2004 (24.02.2004)
- (25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data: 10-2003-0011522

24 February 2003 (24.02.2003)

- (71) Applicant (for all designated States except US): LG Electronics Inc. [KR/KR]; 20, Yoido-dong, Youngdungpo-gu, Seoul 150-010 (KR).
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): SEO, Kang Soo [KR/KR]; 606-503, Chowon Hanyang Apt., 897-5, Pyoungan-dong, Dongan-gu, Anyang, Kyunggi-do 431-075 (KR). KIM, Byung Jin [KR/KR]; 111-204, Hansol Chungu Apt., 110, Jeongja-dong, Bundang-gu, Sungnam, Kyunggi-do, 463-010 (KR).


- (74) Agent: PARK, Lue Bong; 1fl., Dongun Bldg. 413-4, Dogok 2-dong, Kangnam-gu, Seoul 135-272 (KR).
- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

#### Published:

with international search report

[Continued on next page]

(54) Title: RECORDING MEDIUM HAVING DATA STRUCTURE FOR MANAGING PLAYBACK CONTROL AND RECORD-ING AND REPRODUCING METHODS AND APPARATUSES

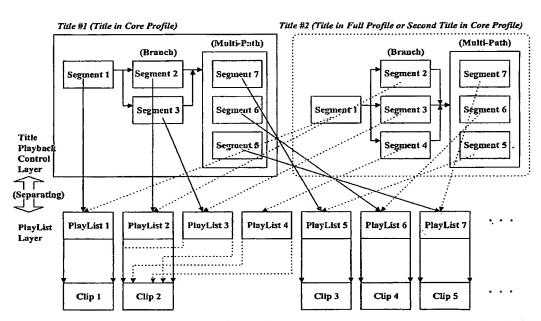

(57) Abstract: The data structure on the recording medium includes a navigation area storing an information file. The information file includes a plurality of navigation segments representing one or more reproduction paths of a title. Each of the navigation segments includes at least one navigation command, and a number of the navigation segments each include a navigation command for launching a playlist. One of the navigation segments is an entry navigation segment of the title.

## WO 2004/075183 A1



For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

# DESCRIPTION

### RECORDING MEDIUM HAVING DATA STRUCTURE FOR MANAGING PLAYBACK CONTROL AND RECORDING AND REPRODUCING METHODS AND APPARATUSES

#### 5 1. TECHNICAL FIELD

The present invention relates to a recording medium having a data structure for managing playback control of at least one title as well as methods and apparatuses for reproduction and recording.

#### 2. BACKGROUND ART

The standardization of new high-density read only and rewritable optical disks capable of recording large amounts of high-quality video and audio data has been progressing rapidly and new optical disk related products are expected to be commercially available in the near future. The Blu-ray Disc Rewritable (BD-RE) is one example of these new optical disks.

Fig. 1 illustrates the file structure of the BD-RE. The file structure or data structure provides for managing the reproduction of the video and audio data recorded on the BD-RE. As shown, the data structure includes a root directory that contains at least 20 one BDAV directory. The BDAV directory includes files such as 'info.bdav', 'menu.tidx', and 'mark.tidx', a PLAYLIST subdirectory in which playlist files (\*.rpls and \*.vpls) are stored, a CLIPINF subdirectory in which clip information files (\*.clpi) are stored, and a STREAM subdirectory in which MPEG2-formatted A/V stream clip files (\*.m2ts) corresponding to the clip information files are stored. In addition to illustrating the data structure of the optical disk, Fig. 1 represents the areas of the optical disk. For example, the general information file info.bdav is stored in a general information area or areas on the optical disk.

Because the BD-RE data structure and disk format as illustrated in Fig. 1 is well-known and readily available, only a brief overview of the file structure will be provided in this disclosure.

5 As alluded to above, the STREAM directory includes MPEG2-formatted A/V stream files called clip files. The STREAM directory may also include a special type of clip referred to as a bridge-clip A/V stream file. A bridge-clip file is used for making seamless connection between two or more presentation intervals 10 selected in the clip files, and generally have a small data size compared to clip files. The A/V stream includes source packets of video and audio data. For example, a source packet of video data includes a header and a transport packet. A source packet includes a source packet number, which is generally a sequentially assigned 15 number that serves as an address for accessing the source packet. Transport packets include a packet identifier (PID). The PID identifies the sequence of transport packets to which a transport packet belongs. Each transport packet in the sequence will have the same PID.

The CLIPINF directory includes a clip information file associated with each A/V stream file. The clip information file indicates, among other things, the type of A/V stream associated therewith, sequence information, program information and timing information. The sequence information describes the arrival time basis (ATC) and system time basis (STC) sequences. For example, the sequence information indicates, among other things, the number of sequences, the beginning and ending time information for each sequence, the address of the first source packet in each sequence and the PID of the transport packets in each sequence. A sequence of source packets in which the contents of a program is constant is called a program sequence. The program information indicates, among other things, the number of program sequences, the starting address for each program sequence, and the PID(s) of transport

packets in a program sequence.

The timing information is referred to as characteristic point information (CPI). One form of CPI is the entry point (EP) map. The EP map maps a presentation time stamp (e.g., on an arrival time 5 basis (ATC) and/or a system time basis (STC)) to a source packet address (i.e., source packet number). The presentation time stamp (PTS) and the source packet number (SPN) are related to an entry point in the AV stream; namely, the PTS and its related SPN point to an entry point on the AV stream. The packet pointed to is often referred to as the entry point packet.

The PLAYLIST directory includes one or more playlist files. The concept of a playlist has been introduced to promote ease of editing/assembling clips for playback. A playlist file is a collection of playing intervals in the clips. Each playing interval is referred to as a playitem. The playlist file, among other things, identifies each playitem forming the playlist, and each playitem, among other things, is a pair of IN-point and OUT-point that point to positions on a time axis of the clip file (e.g., presentation time stamps on an ATC or STC basis). Expressed another way, the playlist file identifies playitems, each playitem points to a clip file or portion thereof and identifies the clip information file associated with the clip file. The clip information file is used, among other things, to map the playitems to the clip of source packets.

A playlist directory may include real playlists (\*.rpls) and virtual playlists (\*.vpls). A real playlist can only use clips and not bridge-clips. Namely, the real playlist is considered as referring to parts of clips, and therefore, conceptually considered equivalent in disk space to the referred to parts of the clips. A virtual playlist can use both clips and bridge-clips, and therefore, the conceptual considerations of a real playlist do not exist with virtual playlists.

The info.bdav file is a general information file that

provides general information for managing the reproduction of the A/V stream recorded on the optical disk. More specifically, the info.bdav file includes, among other things, a table of playlists that identifies the file names of the playlist in the PLAYLIST directory of the same BDAV directory.

The menu.tidx, menu.tdt1 and menu.tdt2 files store information related to menu thumbnails. The mark.tidx, mark.tdt1 and mark.tdt2 files store information that relates to mark thumbnails. Because these files are not particularly relevant to the present invention, they will not be discussed further.

The standardization for high-density read-only optical disks such as the Blu-ray ROM (BD-ROM) is still under way. An effective data structure for managing playback control of a title or titles recorded on the high-density read-only optical disk such as a 15 BD-ROM is not yet available.

#### 3. DISCLOSURE OF INVENTION

The recording medium according to the present invention includes a data structure for managing playback control of at least one title recorded on the recording medium.

In one exemplary embodiment, a navigation area stores an information file including a plurality of navigation segments representing one or more reproduction paths of a title. Each of the navigation segments includes at least one navigation command. A number of the navigation segments each include a navigation command for launching a playlist, and one of the navigation segments is an entry navigation segment of the title.

In one exemplary embodiment, each branch point along the one or more reproduction paths occurs at a boundary of a launched playlist. In another embodiment, each of the navigation segments 30 forming the one or more reproduction paths of the title includes a navigation command for launching a playlist.

The present invention further provides apparatuses and methods for recording and reproducing the data structure according

to the present invention.

#### 4. BRIEF DESCRIPTION OF DRAWINGS

The above features and other advantages of the present invention will be more clearly understood from the following 5 detailed description taken in conjunction with the accompanying drawings, in which:

- Fig. 1 illustrates the prior art file or data structure of a rewritable optical disk according to the Blu-ray Disc Rewritable (BD-RE) standard;
- 10 Fig. 2 illustrates an embodiment of a data structure and method for managing playback control of a high-density recording medium such as a BD-ROM;
  - Fig. 3 illustrates an example of a data structure including a TITLE directory;
- Fig. 4 illustrates another embodiment of a data structure according to the present invention;
  - Fig. 5 illustrates a schematic diagram of a partial structure of an optical disc reproducing apparatus where the present invention is applied; and
- 20 Fig. 6 illustrates an embodiment of a recording and reproducing apparatus according to the present invention.

#### 5. MODES FOR CARRYING OUT THE INVENTION

In order that the invention may be fully understood, exemplary embodiments thereof will now be described with reference 25 to the accompanying drawings.

A high-density recording medium such as a high density optical disk, for example, a Blu-Ray ROM (BD-ROM), BD-RE, etc. in accordance with the invention has a file or data structure for managing reproduction of, for example, video and audio data. Some 30 aspects of the data structure according to the present invention are the same as the well-known BD-RE standard, as such these aspects will not be repeated. Instead, only the different aspects of the

data structures according to the embodiments of the present invention will be described in detail for the sake of brevity.

Programs, video and audio data are typically organized as individual titles; for example, different movies represented by 5 video and audio data are organized as different titles.

Furthermore, a title may be organized into individual chapters in much the same way a book is often organized into chapters.

Because of the large storage capacity of the newer, high-density recording media such as BD-ROM and BD-RE optical disks, 10 different titles, interactive titles, various versions of a title or portions of a title may be recorded, and therefore, reproduced from the recording media. For example, video data representing different camera angles may be recorded on the recording medium. As another example, versions of title or portions thereof 15 associated with different languages may be recorded on the recording medium. As a still further example, a director's version and a theatrical version of a title may be recorded on the recording medium. Or, an adult version, young adult version and young child version (i.e., different parental control versions) of a title or 20 portions of a title may be recorded on the recording medium. Each version, camera angle, etc. represents a different reproduction path, and the video data in these instances is referred to as multiple reproduction path video data.

Fig. 2 illustrates an embodiment of a data structure and 25 method for managing playback control of a title of a high-density recording medium such as a BD-ROM. As shown, A/V streams recorded on a BD-ROM are stored and managed as clip files, and playlists associated with the clip files are managed for playback control of the clip files. In addition, segments associated with the 30 playlists are newly defined and, for example, multiple titles in which some of the segments are arranged in different sequences are managed.

The playlists referencing the recorded A/V stream clip files

are managed in a playlist layer, whereas the playback of playlists such as for multiple titles are managed in a title playback control layer. As a result, the clip files, playlists and multi-titles are managed separately.

In Fig. 2, a first title Title #1 contains Segment 1 through Segment 7 linked to each other in a specific sequence, wherein Segments 2 and 3 constitute a branch structure (a branch multi-path structure) and Segments 5, 6, and 7 constitute a multi-path structure. A segment is a navigation command field providing at 10 least one navigation command associated with reproduction of the recording medium. For example, the entry segment, Segment 1, provides navigation commands for playback of PlayList 1. The Segment 2 and Segment 3 provide navigation commands for playback of PlayList 2 and PlayList 3, respectively. While PlayList 2 references and controls playback of the entire A/V stream of Clip 2, PlayList 3 references and controls playback of only a part of the A/V stream of Clip 2.

Similarly, the Segments 5, 6, and 7 provide navigation commands for playback of PlayLists 5, 6, and 7, respectively. As 20 discussed above, Segments 5, 6 and 7 provide navigation information for different reproduction path. For example, the A/V stream referenced by PlayList 5 may be marked as valid in Korea, the A/V stream referenced by PlayList 6 may be marked as valid in the USA, and the A/V stream referenced by PlayList 7 may be marked as valid in Japan.

As shown in Fig. 2, each branch point along the one or more reproduction paths occurs at a boundary of a launched playlist.

Title #2 in Fig. 2 may be recorded and managed as either a complementary second title or a distinct title. In Title #2, 30 Segments 2, 3, and 4 constitute a branch structure and Segments 5, 6, and 7 constitute a multi-path structure. Title #2 may contain playlists that are associated with Title #1 or may only contain new playlists. Again, each branch point along the one or more

reproduction paths occurs at a boundary of a launched playlist.

The playback sequence and playback control information for the segments contained in Title #2 may be recorded by a program such as 'Java Scriptor', whereas the playback sequence and playback control information for the segments contained in Title #1 may be recorded as commands. Titles exclusively for playing main A/V data are classified as core-profile titles and titles having additional contents such as director's commentary are classified as full-profile titles

Such titles may be stored in a TITLE directory belonging to the BD-ROM file structure. Fig. 3 illustrates an example of a data structure including a TITLE directory. In Fig. 3, for example, the root directory contains a BD-ROM directory and the BD-ROM directory contains a TITLE directory in which a title file named 15 '01001.vts' is placed.

The navigation information contained in the title file '01001.vts', for example, the VTSI may include user interface application information (UIAppInfTitle), a title segment table (TableOfTitleSegment), etc. Each title segment, such as Title 20 Segment 1 contained in TableOfTitleSegment may include a playlist pointer (PlayList Pointer), playlist pre-commands (PL Pre-CMDs), playlist post-commands (PL Post-CMDs), and playitem commands (PI-CMDs) that correspond to the playitems contained in the corresponding playlist.

A PlayList Pointer is special information for linking the title to a playlist among a plurality of playlists placed in the PLAYLIST directory and the name or number of a playlist is stored in a PlayList Pointer. In Fig. 3, the PlayList Pointer for Title Segment 1 points to PlayList 1.

30 The PL Pre-CMDs contain initialization information for playback of the A/V data corresponding to the playlist. The PL Post-CMDs contain information used when terminating the playback of the playlist.

A title segment may be associated with a single playlist or more than one playlists. In the latter case, a title segment includes more than one playlist pointer.

The playitems contained in the playlists are associated with 5 the clip information files placed in the CLIPINF directory. Each of the clip information files is in turn associated with a clip file placed in the STREAM directory.

Fig. 4 illustrates an embodiment of a data structure according to the present invention. As shown, a root directory 10 includes a BD-ROM directory. The BD-ROM directory includes the TITLE directory containing title files (\*.vts) as well as PLAYLIST, CLIPINF, STREAM directories.

The VTSI included in a title file includes UIAppInfoTitle and TableOfTitleSegment explained above with reference to Fig. 3. The 15 TableOfTitleSegment contains a list of title segments. Each of the title segments is associated with one or more playlist files. In Fig. 4, Segment 2 is associated with PlayList 2 and the playitems contained in PlayList 2 have corresponding clip information files stored in the CLIPINF directory. The clip information files are associated with clip files (\*.m2ts) placed in the STREAM directory.

Fig. 5 illustrates a schematic diagram of a partial structure of an optical disc apparatus where the present invention may be applied. As shown, the optical disc apparatus includes an optical pickup 111 for reproducing data from the an optical disk. A VDP (Video Disc Play) system 112 controls the reproduction operation of the optical pickup 111 and demodulates the data reproduced by the optical pickup 111. The VDP system 112 produces an AV stream, which may also be fed to a D/A converter 113 to generate an analog version of the AV stream.

The VDP system 112 controls the optical pickup 111 and demodulates the reproduced data based on user input received from a user interface and the navigation and management information recorded on the optical disk in accordance with the present

invention. During reproduction, the reproduced navigation/management information may be stored in a memory 114. The VDP system 112 plays a title by consulting the segments included in the title file, thereby playing A/V streams in various sequences. 5 A playlist is accessed by the corresponding playlist pointer contained in the title segment.

After performing initialization using PL Pre-CMDs contained in the title segment, the optical disk apparatus plays the A/V stream associated with each of the PI-CMDs. After playing the A/V 10 stream, the optical disk apparatus executes subsequent steps such as selection of a title segment in a branch based on the PL-Post CMDs of the playlist.

On the other hand, the TITLE directory may contain both core-profile title files having only main A/V data and full-profile 15 title files having additional contents as well as main A/V data. Alternatively, core-profile title files and full-profile title files may be stored in two separate directories. For example, full-title files may be stored in a FULLTITLE directory.

The BD-ROM directory may contain a directory named CONTENTS 20 in which various contents such as director's commentary constituting a full-profile title file are stored. Navigation information for the contents files is recorded in the full-profile title file; therefore various contents can be played together with the main A/V data.

Fig. 6 illustrates a schematic diagram of an embodiment of an optical disk recording and reproducing apparatus according to the present invention. As shown, an AV encoder 9 receives and encodes data (e.g., still image data, audio data, etc.). The AV encoder 9 outputs the encoded data along with coding information and stream attribute information. A multiplexer 8 multiplexes the encoded data based on the coding information and stream attribute information to create, for example, an MPEG-2 transport stream. A source packetizer 7 packetizes the transport packets from the

multiplexer 8 into source packets in accordance with the audio/video format of the optical disk. As shown in Fig. 6, the operations of the AV encoder 9, the multiplexer 8 and the source packetizer 7 are controlled by a controller 10. The controller 10 5 receives user input on the recording operation, and provides control information to AV encoder 9, multiplexer 8 and the source packetizer 7. For example, the controller 10 instructs the AV encoder 9 on the type of encoding to perform, instructs the multiplexer 8 on the transport stream to create, and instructs the source packetizer 7 on the source packet format. The controller 10 further controls a drive 3 to record the output from the source packetizer 7 on the optical disk.

The controller 10 also creates the navigation and management information for managing reproduction of the data being recorded 15 on the optical disk. For example, based on information received via the user interface (e.g., instruction set saved on disk, provided over an intranet or internet by a computer system, etc.), the controller 10 controls the drive 3 to record one or more of the data structures of Figs. 2-4 on the optical disk.

During reproduction, the controller 10 controls the drive 3 to reproduce this data structure. Based on the information contained therein, as well as user input received over the user interface (e.g., control buttons on the recording and reproducing apparatus or a remote associated with the apparatus), the controller 10 controls the drive 3 to reproduce the data from the optical disk.

The reproduced source packets are received by a source depacketizer 4 and converted into a data stream (e.g., an MPEG-2 transport packet stream). A demultiplexer 5 demultiplexes the data stream into encoded data. An AV decoder 6 decodes the encoded data to produce the original data that was feed to the AV encoder 9. During reproduction, the controller 10 controls the operation of the source depacketizer 4, demultiplexer 5 and AV decoder 6. The

controller 10 receives user input on the reproducing operation, and provides control information to AV decoder 6, demultiplexer 5 and the source packetizer 4. For example, the controller 10 instructs the AV decoder 9 on the type of decoding to perform, 5 instructs the demultiplexer 5 on the transport stream to demultiplex, and instructs the source depacketizer 4 on the source packet format.

While Fig. 6 has been described as a recording and reproducing apparatus, it will be understood that only a recording or only a 10 reproducing apparatus may be provided using those portions of Fig. 6 providing the recording or reproducing function.

The data structure for and method for managing playback control of a high-density recording medium in accordance with embodiments of the present invention allows effective selection and reproduction of data streams recorded on a high density recording medium such as a BD-ROM.

As apparent from the above description, the present invention provides methods and apparatuses for recording a data structure on a high density recording medium for managing playback control 20 of the recording medium.

While the invention has been disclosed with respect to a limited number of embodiments, those skilled in the art, having the benefit of this disclosure, will appreciate numerous modifications and variations there from. For example, while 25 described with respect to a Blu-ray ROM optical disk in several instances, the present invention is not limited to this standard of optical disk or to optical disks. It is intended that all such modifications and variations fall within the spirit and scope of the invention.

## CLAIMS

1. A recording medium having a data structure for managing playback control of the recording medium, comprising:

a navigation area storing an information file including a 5 plurality of navigation segments representing one or more reproduction paths of a title, each of the navigation segments including at least one navigation command, a number of the navigation segments each including a navigation command for launching a playlist, and one of the navigation segments being an 10 entry navigation segment of the title.

- 2. The recording medium of claim 1, wherein at least one branch point along the one or more reproduction paths occurs at a boundary of a launched playlist.
- 3. The recording medium of claim 2, wherein each branch point 15 along the one or more reproduction paths occurs at a boundary of a launched playlist.
  - 4. The recording medium of claim 3, wherein each of the number of navigation segments includes a navigation command for launching a different playlist.
- 5. The recording medium of claim 4, wherein each of the navigation segments representing the one or more reproduction paths of the title includes a navigation command for launching a playlist.
- 6. The recording medium of claim 5, wherein each launched 25 playlist includes navigation information for reproducing at least a portion of a clip file.
  - 7. The recording medium of claim 6, further comprising:
  - a playlist area storing a playlist directory, the playlist directory storing the at least one playlist;
- 30 a clip information file directory storing at least one clip information file; and

- a stream directory storing at least one clip file.
- 8. The recording medium of claim 1, wherein each of the number of navigation segments includes a navigation command for launching a different playlist.
- 9. The recording medium of claim 1, wherein each of the navigation segments representing the one or more reproduction paths of the title includes a navigation command for launching a playlist.
- 10. The recording medium of claim 9, wherein each of the 10 navigation segments representing the one or more reproduction paths of the title includes a navigation command for launching a different playlist.
- 11. The recording medium of claim 1, wherein each launched playlist includes navigation information for reproducing at least 15 a portion of a clip file.
  - 12. The recording medium of claim 1, further comprising:
  - a playlist area storing a playlist directory, the playlist directory storing the at least one playlist;
- a clip information file directory storing at least one clip 20 information file; and
  - a stream directory storing at least one clip file.
  - 13. A method of recording a data structure for managing playback control of the recording medium, comprising:
- recording an information file on the recording medium, the information file including a plurality of navigation segments representing one or more reproduction paths of a title, each of the navigation segments including at least one navigation command, a number of the navigation segments each including a navigation command for launching a playlist, and one of the navigation segments being an entry navigation segment of the title.
  - 14. A method of reproducing a data structure for managing playback control of the recording medium, comprising:

reproducing an information file from the recording medium,

the information file including a plurality of navigation segments representing one or more reproduction paths of a title, each of the navigation segments including at least one navigation command, a number of the navigation segments each including a navigation command for launching a playlist, and one of the navigation segments being an entry navigation segment of the title.

15. An apparatus for recording a data structure for managing playback control of the recording medium, comprising:

a driver for driving an optical recording device to record.

10 data on the recording medium;

a controller for controlling the driver to record an information file on the recording medium, the information file including a plurality of navigation segments representing one or more reproduction paths of a title, each of the navigation segments including at least one navigation command, a number of the navigation segments each including a navigation command for launching a playlist, and one of the navigation segments being an


16. An apparatus for reproducing a data structure for20 managing playback control of the recording medium, comprising:

entry navigation segment of the title.

a driver for driving an optical reproducing device to reproduce data recorded on the recording medium;

a controller for controlling the driver to reproduce an information file from the recording medium, the information file 25 including a plurality of navigation segments representing one or more reproduction paths of a title, each of the navigation segments including at least one navigation command, a number of the navigation segments each including a navigation command for launching a playlist, and one of the navigation segments being an 30 entry navigation segment of the title.


FIG. 1

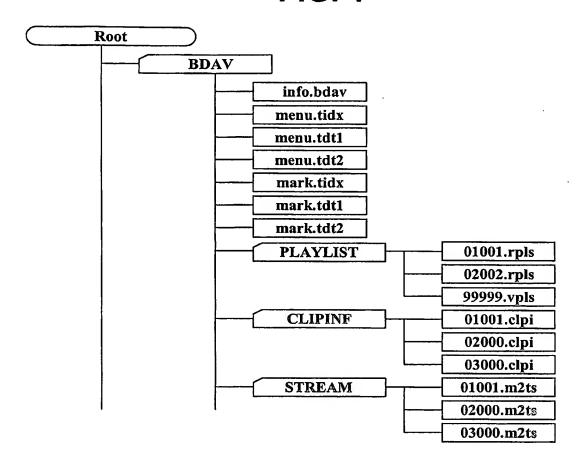



Title #2 (Title in Full Profile or Second Title in Core Profile) (Multi-Path) Ségment 6 Segment 7 Segment 5 PlayList 7 Clip 5 Segment 3 Segment 4 Segment 2 (Branch) PlayList 6 Clip Segment PlayList 5 Clip 3 PlayList 4 (Multi-Path) Segment 5 Segment 6 Segment 7 PlayList 3 Segment 3 Segment 2 (Branch) Title #1 (Title in Core Profile) PlayList 2 Clip 2 PlayList 1 Segment 1 Clip 1 Title
Playback
Control
Layer


(Separating) PlayList Layer

60 C U

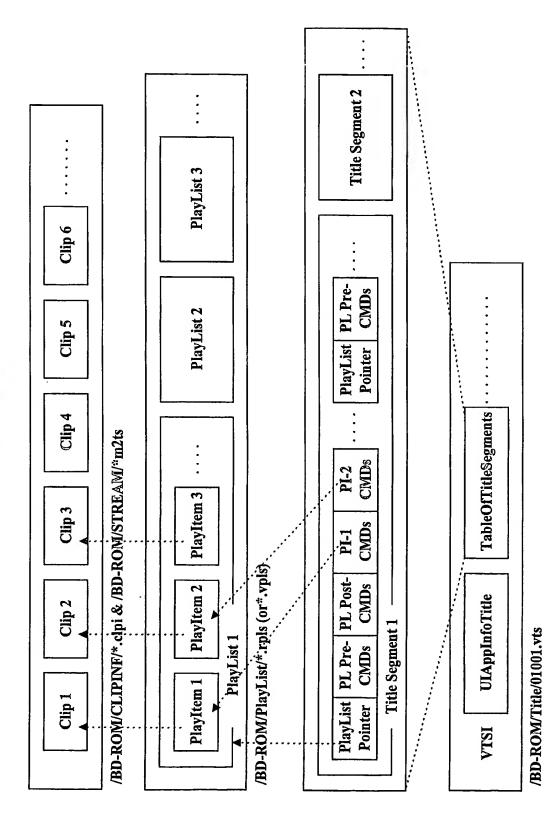

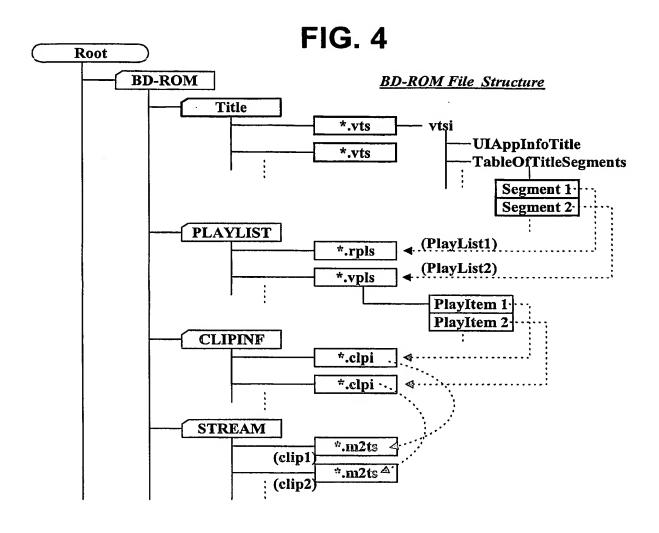

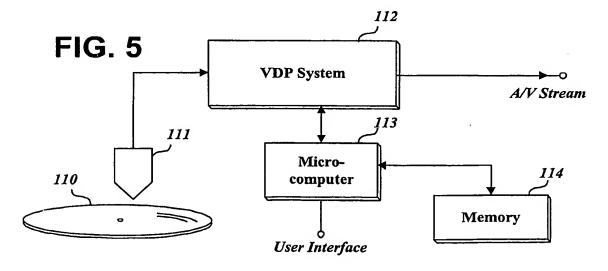

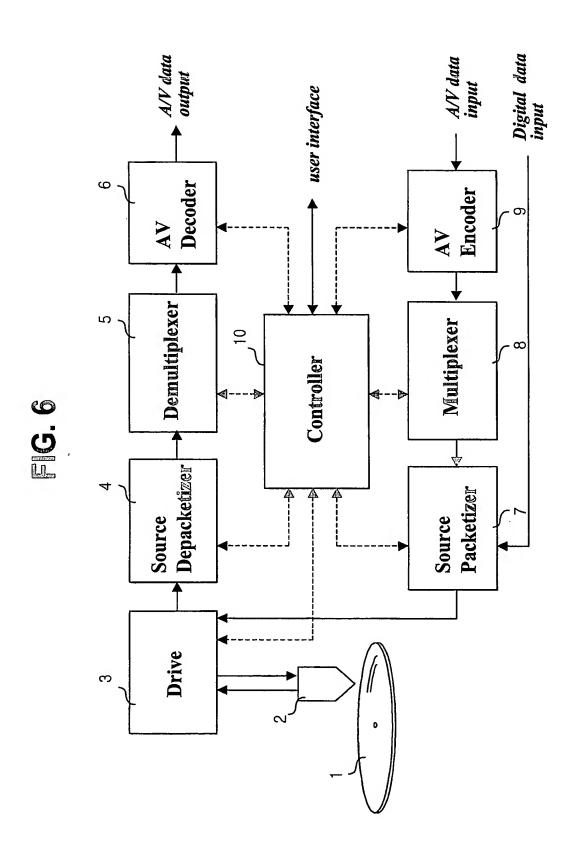

### INTERNATIONAL SEARCH REPORT

national application No.

		-	PCT/KR2004/000368
A. CLASSIFICATION OF SUBJECT MATTER			
IPC7 G11B 19/02			
According to International Patent Classification (IPC) or to both national classification and IPC			
B. FIELDS SEARCHED			
Minimum documentation searched (classification system followed by classification symbols)  IPC7 G11B 19/02			
IFC/ G11B 19/02			
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched			
Korean Patents and applications for inventions since 1975.  Korean Utility models and applications for Utility models since 1975.			
Japanese Utility models and applications for Utility models since 1975.			
Electronic data base consulted during the intertnational search (name of data base and, where practicable, search terms used) WPI, JAPIO, KIPASS			
C. DOCUMENTS CONSIDERED TO BE RELEVANT			
Category*	Citation of document, with indication, where app	requiete of the relevant name	ges Relevant to claim No.
Category			
P,A	WO 2004/001752 A(LG ELECTRONICS Inc.) 31.D. see the whole document.	1-16	
P,A	WO 2004/001750 A(LG ELECTRONICS Inc.) 31.D see the whole document.	1-16	
A	US 06215746 A(TOSHIBA Inc.) 10.APR.2001 see the whole document.	1-16 .	
A	KR 2001/0028735 A(LG ELECTRONICS Inc.) 06,APR.2001 see the whole document.		1-16
A	US 2002/0159368 A1(CHOSAKU NODA) 31.OCT.2002 see the whole document.		1-16
			l l
}			
Further documents are listed in the continuation of Box C.  See patent family annex.			
* Special categories of cited documents: "T" later document published after the international filing date or priority			
"A" document defining the general state of the art which is not considered to be of particular relevance date and not in conflict with the application to be of particular relevance the principle or theory underlying the inver-			with the application but cited to understand anderlying the invention
	"E" carlier application or patent but published on or after the international "X" document of particular relevance; the claim filing date considered novel or cannot be considered		
"L" document which may throw doubts on priority claim(s) or which is step when the document is taken alone cited to establish the publication date of citation or other "Y" document of particular relevance; the claim		is taken alone	
special reason (as specified) considered to involve an inventive step wi			inventive step when the document is
"O" document referring to an oral disclosure, use, exhibition or other combined with one or more other such documents means being obvious to a person skilled in the art			ore other such documents, such combination skilled in the art
"P" document published prior to the international filing date but later "&" document mem than the priority date claimed			
Date of the actual completion of the international search		Date of mailing of the international search report	
21 MAY 2004 (21.05.2004)		22 MAY 2004 (22.05.2004)	
	ailing address of the ISA/KR	Authorized officer	EIEP)
-871	Korean Intellectual Property Office 920 Dunsan-dong, Seo-gu, Daejeon 302-701, Republic of Korea	CHOI, Jeen Scok	
Facsimile No	82-42-472-7140	Telephone No. 82-42-481	-5696